

FLATWORK IRONERS

THE MOST ADVANCED FEATURES IN THE MARKET

Features

C-140/20

- Dries and irons in a single operation directly from a high speed spin washer extractor.
- Front feeding and return of the linen.
- Electric heated.
- Microprocessor 7 preset speeds of ironing.
- Single roll \varnothing 200 mm in polished steel.
- Available working width 1.400 mm.
- Motor with speed inverter.
- Built-in cool down system.
- Painted steel panels.
- Feeding and ironing by Nomex bands.
- Double emergency stops: hands safety bar and front emergency push-button.
- Heating protection by 2 thermostats.



Emisiones
CO₂/huella
de carbono



eficiencia
energética



Fácil mantenimiento



Variador de frecuencia



Microprocesador



Secado



Planchado

TECHNICAL DATA
UNIT.
C-140-20
GENERAL DETAILS

Theoretical production 45% humidity	Kg/h	12-14
Ø Roll	mm	200
Working width	mm	1.400
Height floor-feeding belts	mm	1.000
Working speed	mt/min	1-5
Electronic control	-	Yes
No. Programs	Nº	7
Length folder	Nº	No

POWER



Heating power (electric model)	kW	10,5
Total electric power (electric model)	kW	10,84
Roll motor power	kW	0,25
Fan motor power	kW	0,09

DIMENSIONS / PACKAGING DIMENSIONS

Width / Width	mm	1.885/2.130
Depth / Depth	mm	448/800
Height / Height	mm	1.335/1.560
Weight / Weight	Kg	180/190
Volume	m3	1.13/2.65

OTHERS

No. Fume outlet	Nº	1
Ø Fume outlet	mm	83
Air flow	m3/h	300
Sound Level	dB	55

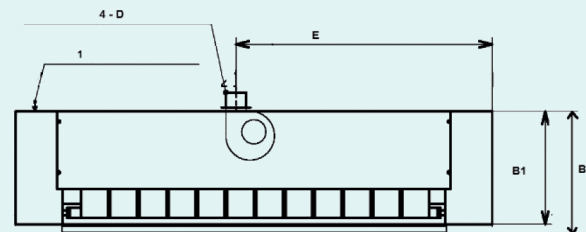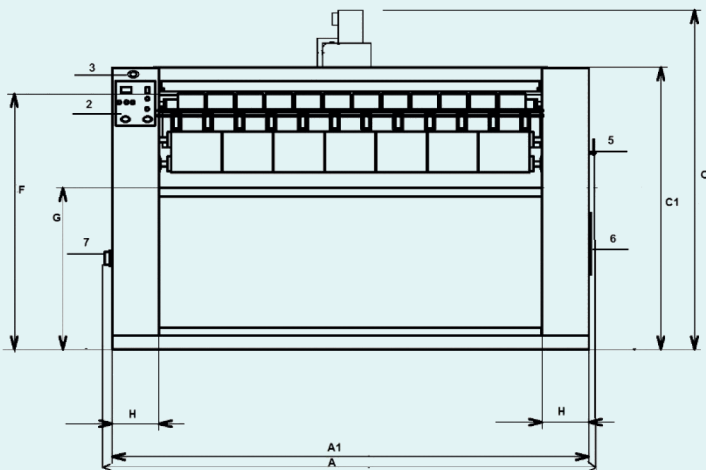

- 01. Electrical connection
- 02. Control panel
- 03. Emergency stop
- 04. Exhaust
- 05. Crank contactor
- 06. Crank
- 07. Main switch

	A	B	C	A1	B1	C1	D	E	F	G	H	I
C-140-20	1.885	448	1.335	1.878	444	1.110	Ø 83	1.020	1.000	635	-	-


Primer

info@primer.es

www.primer.es

www.primerlaundry.com