

LOW SPIN WASHER

RELIABILITY AND ROBUSTNESS

Features

RS-26-36 T

- Low spin rigid-mounted washer extractor.
- It is important to fix the machine to the floor. Anchoring base to order separately (not included).
- G Force **100**.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets (Hot water, Cold water, Soft water).
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50- 60 Hz.
- New microprocessor with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- RS-485 serial communication port for monitoring / remote management.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.



Emissions
CO₂/carbon
footprint



Energy
efficiency



Minimum
consumption
of water



Low chemical
consumption



Touch
technology



Stainless steel



Automatic mixer
(hot/cold water)



Inverter



Wet cleaning



Optimal KG



Easy
maintenance



Third water
inlet



Remote control




Efficient drum
design

Options

- Double drain kit, allow the recovery of the water, with important water savings.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Optimal Kg. Weighing sensor system on feet.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-Service Kits: Coiner and box; Central pay; Delayed opening door option in case of power outage.
- Anchorage base for correct fixation of the washer to the floor.
- 8 mm holes drum.
- Voltage 230 V III 50/60 Hz. Model RS-36.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.

TECHNICAL DATA	UNIT.	RS-26 T	RS-36 T			
DRUM						
Load capacity 1:9 / 1:10	Kg	28/25	39/35			
Volume	l	250	350			
Diameter	mm	770	860			
Depth	mm	530	602			
GENERAL DETAILS						
Washing speed / Spining speed	r.p.m.	48/481	45/455			
G Factor	-	100	100			
Maximum force transmitted	KN	3,4 ±0,6	4,73 ±0,8			
Frequency-dynamic force	Hz	8,01	7,58			
Self-service version	-	Yes	Yes			
Double drain	-	Opt	Opt			
Option 8mm holes drum	-	Yes	Yes			
DOOR						
Height center door / Height door	mm	700/440	735/375			
Diameter	mm	373	560			
POWER						
Motor	kW	2,2	3			
Heating (Electric model)	kW	18	21			
Max. power (Electric model)	kW	18,75	22			
Max. power (steam and hot water)	kW	2,2	3			
CONNECTIONS		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER	
Tension 230V- I + N + T	Nº x mm2 / A	3 x 25 / 100A	3 x 1,5 / 16A	3 x 25 / 100A	3 x 1,5 / 16A	
Tension 230V- III + T	Nº x mm2 / A	4 x 10 / 50A	-	4 x 16 / 63A	-	
Tension 400V- III + N + T	Nº x mm2 / A	5 x 4 / 32A	-	5 x 6 / 40A	-	
Steam inlet (Steam mod.)	inch	3/4"		3/4"		
Maximum steam consumption (Steam mod.)	Kg/h	15		18		
Water inlet	inch	3/4"		3/4"		
Water main pressure	Kgs/cm ²	2-4		2-4		
Maximum water consumption*	Lit/h	164,8		199,6		
Drain	mm/inch	3"		3"		
Drainage capacity	Lit/min	200		200		
DIMENSIONS / PACKING DIMENSIONS						
Width / Width	mm	884/930			979/1.050	
Depth / Depth	mm	1.011/1.180			1.066/1.250	
Height / Height	mm	1.307/1.560			1.411/1.600	
Net weight / Gross weight	kg	340/370			473/503	
Volume	m ³	1,71			2,10	

* N°20 Program, 75% load

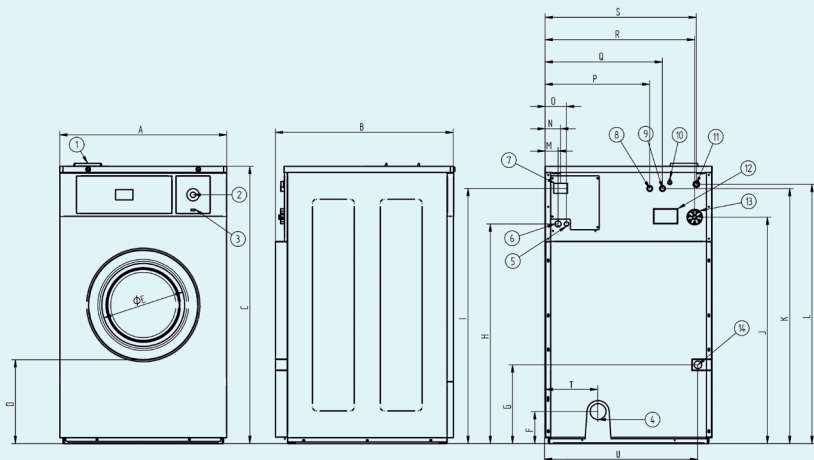

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
RS-26 T	884	1.011	1.307	440	373	138	543	1.035	1.203	1.053	1.218	1.218	61	74	101	410	490	769	810	268	820
RS-36 T	979	1.066	1.411	366	560	143	625	1.139	1.307	1.142	1.322	1.322	61	74	101	506	586	864	906	262	917



Primer

info@primer.es

www.primer.es

www.primerlaundry.com